


## Microtunneling Compact Jacking Frame 520Ton Herrenknecht.



### For Sale & For Rent

Compact jacking frame 5200 KN.

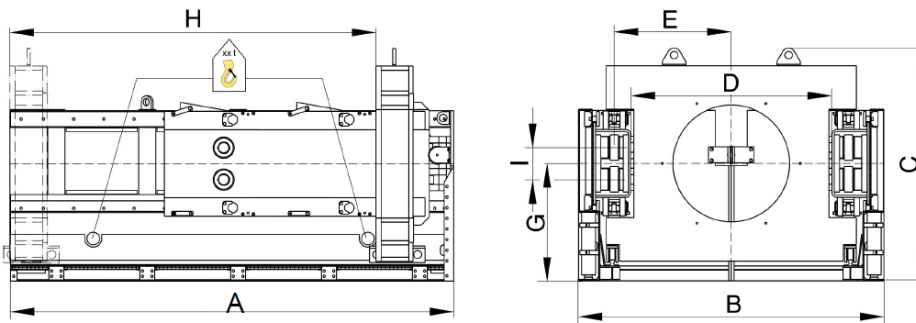

Minimum high shaft bottom / tunnel axis		1280±175	mm
Max. pipe length		3000	mm
Max. Rohraußendurchmesse		1850	mm
Clear width	D	1900	mm
Number of lifting point		4	Numbers
Number of jacking cylinders		4	Numbers
Cylinder size	piston/rod	180/140	mm
Max. cylinder stroke = first stroke		1250	mm
Second cylinder stroke		1153	mm
Total cylinder stroke	H	3450	mm
Max. pressure per cylinder	extend / retract	500/400	bar
jacking force per cylinder	extend / retract	1272/402	kN
Jacking force F	extend / retract	5088/1608	kN
High of pipe axis E for F/2	E	1105	mm
Cylinder centers G for F/2	G	1280	mm
Distance between cylinder axis	I	300	mm